



Heavy Duty Anodised Aluminium Profiles

Product	Guardian Non-Slip Stair Nosing
Material	Anodised Aluminium with Various Insert Tapes
Size	Cut-to-size up to 5.8m
Substrates	Timber, Concrete, Tiles, Vinyl, Rubber, Pavers, Thin Carpet (Not suitable for carpet with underlay)
Standards	National Construction Code D2.13 and D2.14 Manufactured to Australian Standards AS/NZS 1428.1 *
Warranty	Guaranteed for 5 Years

Bullnose with a Ramp Back (80 x 30mm)

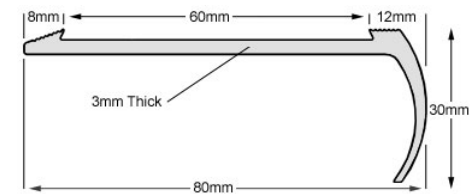

Slimline with a Ramp Back (80 x 10mm) *



Guardian Colour and Stock Codes – [Supplied with Silicon Carbide Tape]

Colours	Application	Bullnose - Ramp Back	Slimline - Ramp Back
Black	Internal and External	GSN-BNR-CBK	GSN-SLR-CBK
Yellow	Internal and External	GSN-BNR-CYL	GSN-SLR-CYL
Grey	Internal and External	GSN-BNR-CMG	GSN-SLR-CMG

Guardian Colour and Stock Codes – [Supplied with Polyurethane Tape]

Colours	Application	Bullnose - Ramp Back	Slimline - Ramp Back
Black	Internal Use Only	GSN-BNR-PBK	GSN-SLR-PBK
Yellow	Internal Use Only	GSN-BNR-PYL	GSN-SLR-PYL
Terracotta	Internal Use Only	GSN-BNR-PTR	GSN-SLR-PTR

Luminance Contrast Requirements

The National Construction Code of Australia and the AS/NSZ 1428.4.1 require a minimum luminance contrast.

The luminance contrast guideline for Stair Nosings to contrast against the base surface is as follow:

- The contrasting colour strip shall have a minimum contrast of 30% against the substrate.
- The contrasting colour strip shall be a continuous 50mm–75mm wide