




Heavy Duty Anodised Aluminium Profiles

Product	Aluminium Recessed Slimline with 5 x Non Slip Insert Strips
Material	Anodised Aluminium with Carborundum Insert (Fixing heads will be visible if required)
Size	Cut-to-size up to 5m*
Substrates	Timber, Concrete, Tiles, Vinyl, Thin Carpet (Not suitable for carpet with underlay)
Standards	National Construction Code D2.13 and D2.14
Warranty	Guaranteed for 10 Years

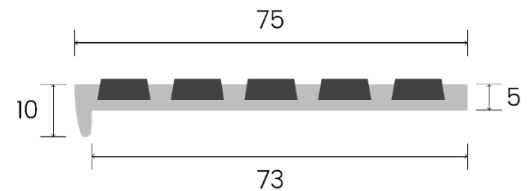

Slip Resistant Testing

AS/NZS 4586:2013	OIL – WET Ramp Analysis	Mean overall acceptance angle = 37.0°	Class R13
AS/NZS 4586:2013	WET Pendulum Analysis	Slip Resistance Value (SRV) = 62	Class P5

Guardian Colour and Stock Codes

Colours	Application	Silver Anodised
Black	Internal and External	GSN-02SS5-BK
Yellow	Internal and External	GSN-02SS5-YL
Ivory	Internal and External	GSN-02SS5-IV

Luminance Reflective Value

Colours	Mean Dry Luminance (LRV)	Mean Wet Luminance (LRV)
Black	30.53	29.89
Yellow	50.43	49.69
Ivory	61.18	58.45

Luminance Contrast Requirements

The National Construction Code of Australia and the AS/NSZ 1428.4.1 require a minimum luminance contrast.

The luminance contrast guideline for Stair Nosings to contrast against the base surface is as follows:

- The strip of contrasting colour shall have a minimum contrast of 30% against the substrate.
- The strip of contrasting colour shall be 50mm–75mm wide.

*Lengths greater than 2.5m may have an additional cost