




## Heavy Duty Anodised Aluminium Profiles

Product	Aluminium Recessed Squarenose with 5 x Non Slip Insert Strips
Material	Anodised Aluminium with Carborundum Insert (Fixing heads will be visible if required)
Size	Cut-to-size up to 5m*
Substrates	Timber, Concrete, Tiles, Vinyl, Thin Carpet (Not suitable for carpet with underlay)
Standards	National Construction Code D2.13 and D2.14
Warranty	Guaranteed for 10 Years

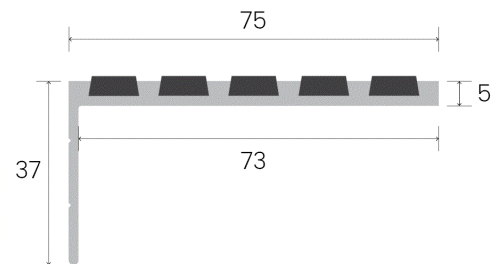

### Slip Resistant Testing

AS/NZS 4586:2013	OIL – WET Ramp Analysis	Mean overall acceptance angle = 37.0°	Class R13
AS/NZS 4586:2013	WET Pendulum Analysis	Slip Resistance Value (SRV) = 62	Class P5

### Guardian Colour and Stock Codes

Colours	Application	Silver Anodised
Black	Internal and External	GSN-02SN5-BK
Ivory	Internal and External	GSN-02SN5-IV

### Luminance Reflective Value

Colours	Mean Dry Luminance (LRV)	Mean Wet Luminance (LRV)
Black	30.53	29.89
Ivory	61.18	58.45

### Luminance Contrast Requirements

The National Construction Code of Australia and the AS/NSZ 1428.4.1 require a minimum luminance contrast.

The luminance contrast guideline for Stair Nosings to contrast against the base surface is as follows:

- The strip of contrasting colour shall have a minimum contrast of 30% against the substrate.
- The strip of contrasting colour shall be 50mm–75mm wide.

\*Lengths greater than 2.5m may have an additional cost