


\*Lengths greater than 2.5m may have an additional cost

# Guardian Stair Nosing



## Heavy Duty Anodised Aluminium Profiles

Product	Aluminium Slimline with 4 x Non Slip Insert Strips
Material	Anodised Aluminium with Carborundum Insert (Fixing heads will be visible if required)
Size	Cut-to-size up to 5m*
Substrates	Timber, Concrete, Tiles, Vinyl, Thin Carpet (Not suitable for carpet with underlay)
Standard	National Construction Code D2.13 and D2.14
Warranty	Guaranteed for 10 Years

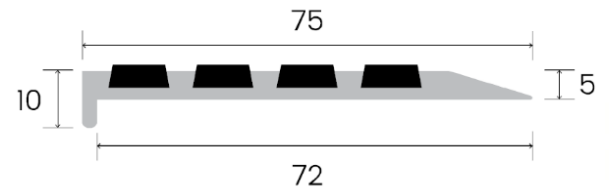

## Slip Resistant Testing

AS/NZS 4586:2013	OIL – WET Ramp Analysis	Mean overall acceptance angle = 37.0°	Class R13
AS/NZS 4586:2013	WET Pendulum Analysis	Slip Resistance Value (SRV) = 73	Class P5

## Guardian Colour and Stock Codes

Colours	Application	Silver Anodised
Black	Internal and External	GSN-02SR4-BK
Yellow	Internal and External	GSN-02SR4-YL
Ivory	Internal and External	GSN-02SR4-IV

## Luminance Reflective Value

Colours	Mean Dry Luminance (LRV)	Mean Wet Luminance (LRV)
Black	31.22	30.57
Yellow	50.57	50.05
Ivory	61.36	58.66

## Luminance Contrast Requirements

The National Construction Code of Australia and the AS/NSZ 1428.4.1 require a minimum luminance contrast.

The luminance contrast guideline for Stair Nosings to contrast against the base surface is as follows:

- The strip of contrasting colour shall have a minimum contrast of 30% against the substrate.
- The strip of contrasting colour shall be 50mm–75mm wide.

\*Lengths greater than 2.5m may have an additional cost