





Heavy Duty Anodised Aluminium Profiles

Product	Guardian Non-Slip Stair Nosing
Material	Anodised Aluminium with Polyurethane Insert Tape
Size	Cut-to-size up to 5.8m
Substrates	Timber, Concrete, Tiles, Vinyl, Rubber, Thin Carpet (Not suitable for carpet with underlay)
Standards	National Construction Code D2.13 and D2.14 Manufactured to Australian Standards AS/NZS 1428.1 *
Warranty	Guaranteed for 5 Years

Bullnose with a Ramp Back (80 x 30mm)

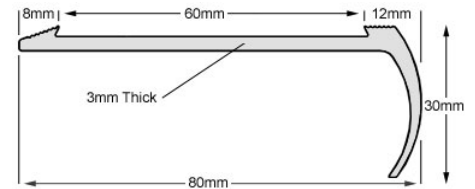

Slimline with a Ramp Back (80 x 10mm) *



Slip Resistant Testing

AS/NZS 4586:2013	OIL - WET Ramp Analysis	Mean overall acceptance angle = 12.6°	Class R10
AS/NZS 4586:2013	WET Pendulum Analysis	Slip Resistance Value (SRV) = 39	Class P3

Guardian Colour and Stock Codes

Colours	Application	Bullnose - Ramp Back	Slimline - Ramp Back
Black	Internal Use Only	GSN-BNR-PBK	GSN-SLR-PBK
Yellow	Internal Use Only	GSN-BNR-PYL	GSN-SLR-PYL
Terracotta	Internal Use Only	GSN-BNR-PTR	GSN-SLR-PTR

Luminance Contrast Requirements

The National Construction Code of Australia and the AS/NSZ 1428.4.1 require a minimum luminance contrast.

The luminance contrast guideline for Stair Nosings to contrast against the base surface is as follow:

- The contrasting colour strip shall have a minimum contrast of 30% against the substrate.
- The contrasting colour strip shall be a continuous 50mm–75mm wide