


Guardian Stair Nosing Systems




Heavy Duty Anodised Aluminium Profiles


Bullnose with a Ramp Back (80 x 30mm)

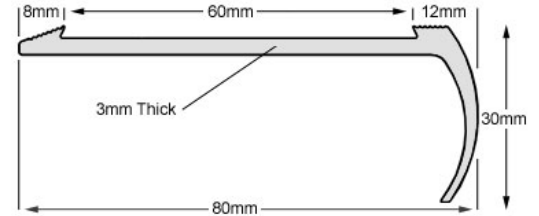

Slimline with a Ramp Back (80 x 10mm) *

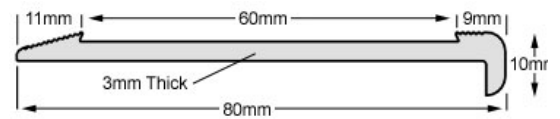

Slimline with a Recessed Back (75 x 10mm) *

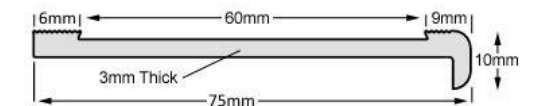

- profile is suitable for a 72mm recess

Product	Guardian Non Slip Stair Nosing
Material	Anodised aluminium with polyurethane insert tape
Substrates	Timber, concrete, bitumen, tiles, vinyl, rubber, carpet
Standards	National Construction Code D2.13 and D2.14 Manufactured to Australian Standards AS/NZS 1428.1 *
Warranty	Guardian Stair Nosing is Guaranteed for 5 Years

Slip Resistant Testing

AS/NZS 4586:2013	OIL - WET Ramp Analysis	Mean overall acceptance angle = 12.6°	Class R10
AS/NZS 4586:2013	WET Pendulum Analysis	Slip Resistance Value (SRV) = 39	Class P3

Guardian Colour and Stock Codes

Colours	Application	Bullnose - Ramp Back	Slimline - Ramp Back	Slimline - Recess Back
Black	Internal and External	GSN-BNR-PBK	GSN-SLR-PBK	GSN-SLS-PBK
Safety Yellow	Internal and External	GSN-BNR-PYL	GSN-SLR-PYL	GSN-SLS-PYL
Terracotta	Internal and External	GSN-BNR-PTR	GSN-SLR-PTR	GSN-SLS-PTR

Heavy Duty non-slip surface for complete safety
Available in 3 popular colours:
BLACK, GREY, and SAFETY YELLOW

The non-slip Silicon Carbide self adhesive backing provides a Seamless Finish - just Peel, Bond and Walk

Natural Satin Anodised 15 micron finish

Pre-drilled profiles for countersunk screw fixing